


OEM Peristaltic Pump Without Drive



T-S403



Step Motor.

Special pump head mounting bracket can be fitted with single KZ15-14 or KZ10-24 pump head.

Ideal OEM peristaltic pump for equipments and instruments. Panel installation as standard. Soleplate installation can be customized.

Meet RoHS requirement.

Motor Specifications

Step angle	1.8°
Phase	2
Phase voltage	6.56V
Phase current	0.8A
Resistance	8.2Ω±10%
Inductance	15.4mH±20%


Motor Port

Line Color	Definition
Brown	A
Orange	A̅
Red	B
Yellow	B̅

Pump Specification

Speed	≤100rpm
Dimension(L×W×H)	56×60×73(mm)
Relative humidity	<80%
Operating temperature	0 to 40°C

Installation Drawing

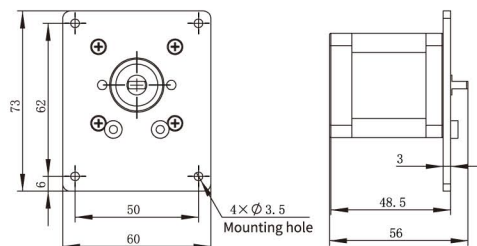

Model (Product Code)	Pump Head (Product Code)	Channel Number	Roller Number	Roller/Housing Material	Speed (rpm)	Tubing	Max. Flow Rate (mL/min)
T-S403 (05.65.203)	KZ10-24-A (05.01.27A)	2	4	POM	≤100rpm	ID≤3.17mm Wall thickness 0.86mm	23
	KZ10-24-C (05.01.27C)			PVDF			
	KZ15-14-A (05.01.28A)	1		POM		13" 14" 19" 16"	42
	KZ15-14-C (05.01.28C)			PVDF			